



Cam Spray Trailer Mounted Sewer and Drain Jetters

The Cam Spray SK4007H and SK2712H are the big brothers to the SK2112 in performance and features. These models are equipped to perform in residential and commercial applications quickly and effortlessly. The Cam Spray SK4007H and the SK2712H are loaded with features of machines costing thousands of dollars more. Both models use a 27 h.p. Honda Engine driving an Industrial Triplex Plunger Pump with stainless steel valves, ceramic plungers and a power pulse valve to help blast away tough clogs and navigate longer runs with 90 and 45 degree elbows. Standard features include a five gallon fuel tank, low oil shut-down, keyed ignition switch with electric start, choke lever, hour meter, fuel filter and fuel pump. The inlet water lines are 1 1/4" rigid inlet hose with a high volume water filter and shut off valve. An Air purge Valve on the pump is available to blow all of the water out of the complete system from pump inlet to hose discharge to help protect the system from freezing conditions, an optional anti-freeze tank is also available. The trailer is heavily constructed with steel tube box frame, full diamond plate deck, diamond plate protective cover on Pump and Engine, retractable tongue, DOT rated 3500# axle, road ready lights and wiring, powder coated finish, 15" Chrome Wheels, 6 bolt hubs and jack stands front and rear. A 150 gallon water tank has a drain and float switch to shut the system down in the event the tank runs out of water. Just fill the tank using the 2" hydrant fill, or hose fill with the 150' garden hose on the hand crank reel. Cam Spray recommends the tank be filled while on location. If your application requires you to transport water on roadways we would advise adding baffles to the tank. Contact Cam Spray for information on baffles for this model.

The Cam Spray SK4007H and SK2712H have controls located on the rear of the trailer in the area where most of your work is done. A large pressure gauge allows for monitoring the system pressure, a high pressure water valve controls water flow, and a remote throttle control governs the speed of the engine. The 12 Volt DC powered reel features a 2:1 drive system with a locking pin on the reel. The reel allows for free spooling of the hose while going into the drain and powered assist when retracting the hose from the drain. The reel is activated by a push button switch on the reel motor or can be activated by using the foot switch that is included.

A retractable hose guide on the back of the trailer aids in guiding the hose into the drain or sewer line. For cold weather operation Cam Spray has made recirculation of the water easy. By simply removing the nozzle from the jet hose, attach the quick coupler plug and connect the hose to the recirculation coupler on the top of the tank. Turn the water shut-off valve back on and the water will continue to circulate keeping the system from freezing. Be sure to adjust engine speed to keep water flowing adequately as low flow and colder temps can still set up a water freezing condition.

The Cam Spray SK4007H and SK2712H Sewer and Drain Jetter standard equipment includes a 4 nozzle set (laser, degreaser/deicer, monster mole and flusher/ram) a storage box and a tip cleaner, a tiger tail to protect your hose when entering the drain line, safety shield, rubber gloves, a high visibility safety vest, strobe light with 5' extension pole and a bank of three 12V DC power ports located in the tool box for the strobe and other accessories. Remember to use adequate safety gear and extreme caution while operating machinery.


When you are finished with the job wash down the area with the 50' wash down hose and trigger gun that is stored on a convenient reel right on the front to the machine.

All of your valuable accessories can be stored in the lockable tool box located on the rear of the trailer.

7-11 1/2 gallons per minute



SK2712H Engine and Pump.

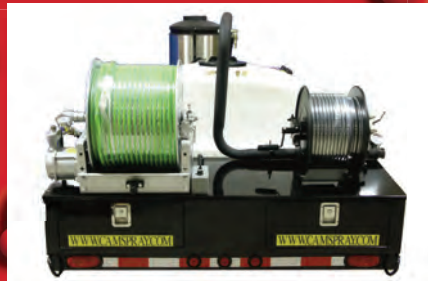

SK2712H, Powered Reel, Hydrant Fill, 150 gallon tank, 150' Tank Fill hose on manual reel, Locking Tool Boxes.



800-620-4773
www.rjmcompany.com



Cam Spray Trailer Mounted Sewer and Drain Jetters



7-11 1/2 gallons per minute

SK4007H with diamond plate protective cover over pump/engine.

Model	PSI	GPM	H.P.	Engine	Jet Hose Dimensions	Reel Type	Water Tank Capacity	Dimensions L x W x H	Dry Weight
SK4007H	4000	7	27	Honda	300' x 3/8"	Powered	150 gallon	132" x 60" x 48"	1750 lbs
SK2712H	2700	11.5	27	Honda	300' x 1/2"	Powered	150 gallon	132" x 60" x 48"	1750 lbs

Don't see exactly what you want? Look at page 11 & 12 for examples of some of the custom equipment we have built for others.



800-620-4773
www.rjmcompany.com