

## DuraFlex

Our DuraFlex cable is a favorite among Duracable service technicians. We manufacture it from a proprietary, hard-drawn, high-tensile, strength wire in a variety of diameters, lengths and flexible characteristics to fit every application.

DuraFlex Cable comes in a variety of flexible styles, including: Hollow Core, Loose Wound Hollow Core, Inner Core, Loose Wound Inner Core, Cable-In-Cable, Oil-Tempered Hollow Core and Oil-Tempered Inner Core.



All cable is packaged and shipped to you in a unique carton that eliminates problems caused by banding and protects the cable during the shipping process. The cable loads easily into your machine with fewer kinks, longer life and better return on your investment.

We thoroughly test our cable before distribution. If the cable does not pass any of the tests, it is discarded and will not be sold. The entire shipment of wire is returned to our supplier. If the cable passes all of the tests, it is boxed and tagged for use.

### Testing

At Duracable we thoroughly test our cables to make sure our quality is the highest on the market. Every coil of wire that comes into our warehouse is tested and the results are documented. If any of the tests fail, that coil of wire is discarded and not used in the manufacturing of our DuraFlex cable. We test more than 27,000 pieces of cable per year, which equals more than 15.4 million feet of wire. Only the best can be DuraFlex cable.

### Inside/Outside Diameter Test

Our diameter test checks the outside and inside diameter of the cable. The gauge used in the tests tells us the diameter of the cable, to make sure it meets our specifications.

### Drop Test

The drop test checks to make sure the stiffness of the cable is adequate. If cable is too limber it will not move through the drain properly. Duracable also manufactures loose wound cable for those who prefer that style of cable. Another option is to add a loose wound leader to your firmer DuraFlex cable. With our stiff cable you can get more life (*and more jobs*) per cable.

### Twist Test

In our twist test, one end of the cable is restrained to keep it in place while the other end is twisted with our machines. We set a gauge to a specific PSI and the motor then turns the cable until it knots or breaks. The number of turns, or "twists," are recorded. The gauge will tell us how many foot-pounds of torque the cable can take before it knots or breaks.

### Stretch Test

For the stretch test, the cable is mounted onto our stretch indicator and the pressure gauge is set. The distance between the coils is less than 1/3 the thickness of a human hair. We stretch the cable until a feeler gauge can be inserted between the links on the cable. The pounds of pressure and distance are recorded for cable consistency. The cable is then stretched and we check to see how many pounds of pressure it took to make the cable stretch. We then bring the cable back to the point where there is no pressure on the coils and we measure how much the cable actually stretched.



CABLE	
Part#	Description
<b>1/4" CABLE</b>	
CH25-037	1/4" Hollow Core x 37'
CH25-050	1/4" Hollow Core x 50'
CH25-075	1/4" Hollow Core x 75'
CH25-100	1/4" Hollow Core x 100'
CH25-CUS	1/4" Hollow Core x Custom length – PER FOOT
CH25-037LW	1/4" Hollow Core, Loose Wound x 37'
CH25-050LW	1/4" Hollow Core, Loose Wound x 50'
CI25-037	1/4" Inner Core x 37'
CI25-050	1/4" Inner Core x 50'
CI25-075	1/4" Inner Core x 75'
CI25-100	1/4" Inner Core x 100'
CI25-CUS	1/4" Inner Core x Custom length – PER FOOT
<b>5/16" CABLE</b>	
CH31-037	5/16" Hollow Core x 37'
CH31-050	5/16" Hollow Core x 50'
CH31-075	5/16" Hollow Core x 75'
CH31-100	5/16" Hollow Core x 100'
CH31-CUS	5/16" Hollow Core x Custom length – PER FOOT
CI31-037	5/16" Inner Core x 37'
CI31-CUS	5/16" Inner Core x Custom length – PER FOOT

Please specify if you would like ends on your cable when ordering.

WEIGHT (per foot)	
1/4" Hollow Core	.12 lbs.
1/4" Inner Core	.13 lbs.
5/16" Hollow Core	.20 lbs.
5/16" Inner Core	.21 lbs.

## Cable Comparison

### Hollow-Core

Standard multi-purpose cable that is made from hard-drawn, high-tensile wire in a variety of diameters and lengths.

### Inner Core

Featuring a nylon floating strand which works against cable kinking and breakage. The nylon inner core gives more life to the cable at a small cost and doesn't add much weight to the cable.

### Cable-In-Cable

Also designed for long, straight runs, cable-in-cable is the stiffest cable we manufacture. The inner cable makes it more durable and therefore, less likely to break.

### Oil-Tempered

This cable is made of a stiffer material and is designed for long, straight runs. Because of the stronger material, the cable pushes like a rod through line blockages.

### Loose-Wound

Loose wound cable is very flexible and tackles corners faster and easier. It also fits in smaller reels easier without snaking. Available in hollow or inner core cable.

## Cable 1/4" & 5/16"

Ideal for household clogs, sinks, tubs, and other minor jobs, this cable is light enough to maneuver smaller household drains. For use in 1" to 2" lines.



1/4" Cable with male end (NA3)

FEMALE END FITTINGS		
Part#	10 Pack	Description
<b>FOR 1/4" CABLE</b>		
NA3F	NA3F-PK10	Female end for 1/4" cable
NA3FK	n/a	Female end kit for 1/4" cable (end, bolt #HHCS4, washer #WA22)
<b>FOR 5/16" CABLE</b>		
NA2F	NA2F-PK10	Female end for 5/16" cable
NA2FK	n/a	Female end kit for 5/16" cable (end, bolt #HHCS4, washer #WA22)
<b>MALE END FITTINGS</b>		
Part#	10 Pack	Description
<b>FOR 1/4" CABLE</b>		
NA3	n/a	Male end for 1/4" cable
NA3K	NA3K-PK10	Male end kit for 1/4" cable (end, nut #HXNUT7, washer #WA22)
<b>FOR 5/16" CABLE</b>		
NA2	NA2-PK10	Male end for 5/16" cable
NA2K	n/a	Male end kit for 5/16" cable (end, nut #HXNUT7, washer #WA22)
<b>COUPLINGS</b>		
Part#	Description	
HXNUT13	Coupling sleeve for 1/4 - 1/2" cable (sold individually)	

CABLE	
Part#	Description
<b>3/8" CABLE</b>	
CH38-050	3/8" Hollow Core x 50'
CH38-060	3/8" Hollow Core x 60'
CH38-075	3/8" Hollow Core x 75'
CH38-090	3/8" Hollow Core x 90'
CH38-100	3/8" Hollow Core x 100'
CH38-CUS	3/8" Hollow Core x Custom Length – PER FOOT
CH38-075LW	3/8" Hollow Core, Loose Wound x 75'
CI38-060	3/8" Inner Core x 60'
CI38-075	3/8" Inner Core x 75'
CI38-090	3/8" Inner Core x 90'
CI38-100	3/8" Inner Core x 100'
CI38-CUS	3/8" Inner Core x Custom Length – PER FOOT
CI38-090LW	3/8" Inner Core, Loose Wound x 90'

Please specify if you would like ends on your cable when ordering.

<b>WEIGHT (per foot)</b>	
3/8" Hollow Core	.24 lbs.
3/8" Inner Core	.25 lbs.

## Cable Comparison

### Hollow-Core

Standard multi-purpose cable that is made from hard-drawn, high-tensile wire in a variety of diameters and lengths.

### Inner Core

Featuring a nylon floating strand which works against cable kinking and breakage. The nylon inner core gives more life to the cable at a small cost and doesn't add much weight to the cable.

### Cable-In-Cable


Also designed for long, straight runs, cable-in-cable is the stiffest cable we manufacture. The inner cable makes it more durable and therefore, less likely to break.

### Oil-Tempered

This cable is made of a stiffer material and is designed for long, straight runs. Because of the stronger material, the cable pushes like a rod through line blockages.

### Loose-Wound

Loose wound cable is very flexible and tackles corners faster and easier. It also fits in smaller reels easier without snaking. *Available in hollow or inner core cable.*

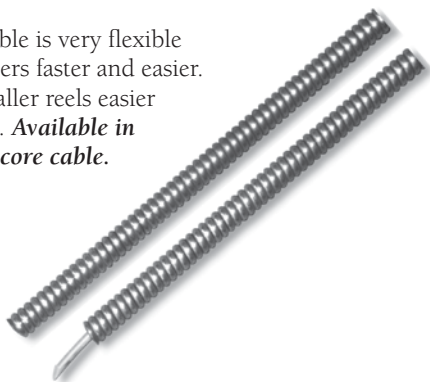

## Cable 3/8"

Our best selling "small" cable. Whether it's tubs, sinks, kitchen traps or washing machine lines — use this cable to tackle all of your light duty jobs in lines up to 3".

### FEMALE END FITTINGS

Part#	10 Pack	Description
NA13	NA13-PK10	Female end for 3/8" cable
NA13K	NA13K-PK10	Female end kit for 3/8" cable (end, bolt #HHCS4, washer #WA22)
GEFC38	n/a	Female end for 3/8" cable (General Style)



NA14  
1/2" Female

### MALE END FITTINGS

Part#	10 Pack	Description
NA1	NA1-PK10	Male end for 3/8" cable
NA1K	NA1K-PK10	Male end kit for 3/8" cable (end, nut #HXNUT7, washer #WA22)
GEMC38	n/a	Male end for 3/8" cable (General Style)



NA1  
3/8" Male

### SPLICE CORES

Part#	10 Pack	Description
NA9	NA9-PK10	Splice Core for 3/8" cable
NA9S	NA9S-PK10	Splice Core (Hex) for 3/8" cable

### COUPLINGS

Part#	10 Pack	Description
HXNUT13	n/a	Coupling Sleeve for 1/4" - 1/2" cable (sold individually)



NA9  
3/8" Splice  
Core End



HXNUT13  
Coupling Sleeve

CABLE	
Part#	Description
<b>1/2" CABLE</b>	
CH50-060	1/2" Hollow Core x 60'
CH50-075	1/2" Hollow Core x 75'
CH50-090	1/2" Hollow Core x 90'
CH50-100	1/2" Hollow Core x 100'
CH50-CUS	1/2" Hollow Core x Custom length – PER FOOT
CH50-075LW	1/2" Hollow Core, Loose Wound x 75'
CI50-060	1/2" Inner Core x 60'
CI50-075	1/2" Inner Core x 75'
CI50-090	1/2" Inner Core x 90'
CI50-100	1/2" Inner Core x 100'
CI50-CUS	1/2" Inner Core x Custom length – PER FOOT

Please specify if you would like ends on your cable when ordering.

<b>WEIGHT (per foot)</b>	
1/2" Hollow Core	.44 lbs.
1/2" Inner Core	.45 lbs.

## Cable Comparison

### Hollow-Core

Standard multi-purpose cable that is made from hard-drawn, high-tensile wire in a variety of diameters and lengths.

### Inner Core

Featuring a nylon floating strand which works against cable kinking and breakage. The nylon inner core gives more life to the cable at a small cost and doesn't add much weight to the cable.

### Cable-In-Cable

Also designed for long, straight runs, cable-in-cable is the stiffest cable we manufacture. The inner cable makes it more durable and therefore, less likely to break.

### Oil-Tempered

This cable is made of a stiffer material and is designed for long, straight runs. Because of the stronger material, the cable pushes like a rod through line blockages.

### Loose-Wound

Loose wound cable is very flexible and tackles corners faster and easier. It also fits in smaller reels easier without snaking. Available in hollow or inner core cable.



## Cable 1/2"

Designed for tough jobs in lines less than 4", our 1/2" cable can get the job done. Using this cable along with regular or heavy-duty blades can help clean the line.

### FEMALE END FITTINGS

Part#	10 Pack	Description
NA14	NA14-PK10	Female end for 1/2" cable
NA14K	NA14K-PK10	Female end kit for 1/2" cable (end, bolt #HHCS4, washer #WA22)
GEFC50	N/A	Female end for 1/2" cable (General Style)
S50F	N/A	Female end for 1/2" cable (Spartan Style)
RLPIN10	N/A	1/4" diameter x 1/2" roll pin



### MALE END FITTINGS

Part#	10 Pack	Description
NA12	NA12-PK10	Male end for 1/2" cable w/ 1/4" x 28 thread
NA12K	NA12K-PK10	Male end kit for 1/2" cable w/ 1/4" x 28 thread (end, nut #HXNUT7, washer #WA22)
NA1238	NA1238-PK10	Male end for 1/2" cable w/ 3/8" x 28 thread
NA1238K	NA1238K-PK10	Male end kit for 1/2" cable w/ 3/8" x 28 thread (end, nut #HXNUT11, washer #WA10)
GEMC50	N/A	Male end for 1/2" cable (General Style)
A6G	N/A	Male end for 1/2" cable (General Style)
S50M	N/A	Male end for 1/2" cable (Spartan Style)



### SLIP JOINT ENDS

Part#	10 Pack	Description
A2G	A2G-PK10	Slip Joint End for 1/2" cable

### SPLICE CORES

Part#	10 Pack	Description
NA11	NA11-PK10	Splice Core for 1/2" cable
NA11S	NA11S-PK10	Splice Core (Hex) for 1/2" cable

### COUPLINGS

Part#	10 Pack	Description
HXNUT13	N/A	Coupling sleeve for 1/4" - 1/2" cable



CABLE	
Part#	Description
<b>5/8" CABLE</b>	
CH62-080	5/8" Hollow Core x 80'
CH62-100	5/8" Hollow Core x 100'
CH62-120	5/8" Hollow Core x 120'
CH62-CUS	5/8" Hollow Core x Custom length – PER FOOT
CI62-025	5/8" Inner Core x 25'
CI62-050	5/8" Inner Core x 50'
CI62-080	5/8" Inner Core x 80'
CI62-100	5/8" Inner Core x 100'
CI62-CUS	5/8" Inner Core x Custom length – PER FOOT

Please specify if you would like ends on your cable when ordering.

WEIGHT (per foot)	
5/8" Hollow Core	.70 lbs.
5/8" Inner Core	.71 lbs.

## Cable Comparison

### Hollow-Core

Standard multi-purpose cable that is made from hard-drawn, high-tensile wire in a variety of diameters and lengths.

### Inner Core

Featuring a nylon floating strand which works against cable kinking and breakage. The nylon inner core gives more life to the cable at a small cost and doesn't add much weight to the cable.

### Cable-In-Cable

Also designed for long, straight runs, cable-in-cable is the stiffest cable we manufacture. The inner cable makes it more durable and therefore, less likely to break.

### Oil-Tempered

This cable is made of a stiffer material and is designed for long, straight runs. Because of the stronger material, the cable pushes like a rod through line blockages.

### Loose-Wound

Loose wound cable is very flexible and tackles corners faster and easier. It also fits in smaller reels easier without snaking. Available in hollow or inner core cable.



## Cable 5/8"

DuraFlex cable is perfect when you need a cable that can handle both small and large jobs on lines up to 6".

FEMALE END FITTINGS		
Part#	10 Pack	Description
A4D	n/a	Female end for 5/8" cable
A4DK	A4DK-PK10	Female end kit for 5/8" cable (end, bolt #HHCS41, washer #WA10)
GEFC62	N/A	Female end for 5/8" cable (General Style)
S62F	N/A	Female end for 5/8" cable (Spartan Style)
R92810	N/A	Female end for 5/8" cable (Ridgid Style)
RLPIN7	N/A	1/4" diameter x 5/8" coil pin



A4D  
5/8" Female



GEFC62  
5/8" Female



S62F  
5/8" Female



R92810  
5/8" Female

MALE END FITTINGS		
Part#	10 Pack	Description
A2D	A2D-PK10	Male end for 5/8" cable
A2DK	N/A	Male end kit for 5/8" cable (end, nut #HXNUT11, washer #WA10)
GEMC62	N/A	Male end for 5/8" cable (General Style)
S63M	N/A	Male end for 5/8" cable (Spartan Style)
R92805	N/A	Male end for 5/8" cable (Ridgid Style)



A2D  
5/8" Male



GEMC62  
5/8" Male



S63M  
5/8" Male



R92805  
5/8" Male

SLIP JOINT ENDS		
Part#	10 Pack	Description
A2JD	A2JD-PK10	Slip Joint End for 5/8" cable

SPLICE CORES		
Part#	10 Pack	Description
A1D	A1D-PK10	Splice Core for 5/8" cable

COUPLINGS		
Part#	10 Pack	Description
HXNUT24	N/A	Coupling sleeve for 5/8" cable (sold individually)



A1D  
5/8" Splice Core End



A2JD  
5/8" Slip Joint



HXNUT24  
Coupling Sleeve

CABLE	
Part#	Description
<b>11/16" CABLE</b>	
CH69-080	11/16" Hollow Core x 80'
CH69-100	11/16" Hollow Core x 100'
CH69-110	11/16" Hollow Core x 110'
CH69-120	11/16" Hollow Core x 120'
CH69-130	11/16" Hollow Core x 130'
CH69-150	11/16" Hollow Core x 150'
CH69-CUS	11/16" Hollow Core x Custom length – PER FOOT
CH69-110LW	11/16" Hollow Core, Loose Wound x 110'
CI69-080	11/16" Inner Core x 80'
CI69-100	11/16" Inner Core x 100'
CI69-110	11/16" Inner Core x 110'
CI69-120	11/16" Inner Core x 120'
CI69-150	11/16" Inner Core x 150'
CI69-CUS	11/16" Inner Core x Custom length – PER FOOT
OH69-080	11/16" Oil Tempered, Hollow Core x 80'
OH69-100	11/16" Oil Tempered, Hollow Core x 100'
OH69-110	11/16" Oil Tempered, Hollow Core x 110'
OH69-120	11/16" Oil Tempered, Hollow Core x 120'
OH69-130	11/16" Oil Tempered, Hollow Core x 130'
OH69-150	11/16" Oil Tempered, Hollow Core x 150'
OH69-CUS	11/16" Oil Tempered, Hollow Core x Custom length – PER FOOT
CC69-025	11/16" Cable-in-cable x 25'
CC69-050	11/16" Cable-in-cable x 50'
CC69-100	11/16" Cable-in-cable x 100'
CC69-110	11/16" Cable-in-cable x 110'

Please specify if you would like ends on your cable when ordering.

### WEIGHT (per foot)

<b>11/16" Hollow Core</b>	<b>.76 lbs.</b>
<b>11/16" Inner Core</b>	<b>.77 lbs.</b>
<b>11/16" Oil Tempered</b>	<b>.77 lbs.</b>
<b>11/16" Cable-in-cable</b>	<b>.94 lbs.</b>

## Cable Comparison

### Hollow-Core

Standard multi-purpose cable that is made from hard-drawn, high-tensile wire in a variety of diameters and lengths.

### Inner Core

Featuring a nylon floating strand which works against cable kinking and breakage. The nylon inner core gives more life to the cable at a small cost and doesn't add much weight to the cable.

### Cable-In-Cable

Also designed for long, straight runs, cable-in-cable is the stiffest cable we manufacture. The inner cable makes it more durable and therefore, less likely to break.

### Oil-Tempered

This cable is made of a stiffer material and is designed for long, straight runs. Because of the stronger material, the cable pushes like a rod through line blockages.

### Loose-Wound

Loose wound cable is very flexible and tackles corners faster and easier. It also fits in smaller reels easier without snaking.

Available in hollow or inner core cable.

**RJM 800-620-4773 www.rjmcompany.com brianmoss@rjmcompany.com**

## Cable 11/16"

When you are trying to run those T's angles, and hard to reach spots, use 11/16" cable for the flexibility you need on both small and large jobs.

FEMALE END FITTINGS		
Part#	10-Pack	Description
A4J	A4J-PK10	Female end for 11/16" cable
A4JK	A4JK-PK10	Female end kit for 11/16" cable (end, bolt #HHCS41, washer #WA10)
S68F	N/A	Female end for 11/16" cable (Spartan Style)
RLPIN6	N/A	1/4" diameter x 3/4" roll pin for S68F



A4J  
11/16" Female



S68F  
11/16" Female

### MALE END FITTINGS

Part#	10-Pack	Description
A2N	A2N-PK10	Male end for 11/16" cable
A2NK	A2NK-PK10	Male end kit for 11/16" cable (end, nut #HXNUT11, washer #WA10)
S69M	N/A	Male end for 11/16" cable (Spartan Style)
68563	N/A	Male end (long) for 11/16" cable (Spartan Style)



A2N  
11/16" Male



S69M  
11/16" Male

### SLIP JOINT ENDS

Part#	10-Pack	Description
A2J	A2J-PK10	Slip Joint End for 11/16" cable

### SPLICE CORES

A1J	A1J-PK10	Splice Core for 11/16" cable
A1JS	A1JS-PK10	Splice Core (Hex) for 11/16" cable

### COUPLINGS

HXNUT25	N/A	Coupling sleeve for 11/16" to 3/4" cable (sold individually)
---------	-----	--



A2J  
11/16" Slip Joint



A1J  
11/16" Splice  
Core End



A1JS  
11/16" Splice  
Core Hex



HXNUT25  
Coupling  
Sleeve

CABLE	
Part#	Description
<b>3/4" CABLE</b>	
CH75-050	3/4" Hollow Core x 50'
CH75-080	3/4" Hollow Core x 80'
CH75-100	3/4" Hollow Core x 100'
CH75-110	3/4" Hollow Core x 110'
CH75-120	3/4" Hollow Core x 120'
CH75-130	3/4" Hollow Core x 130'
CH75-140	3/4" Hollow Core x 140'
CH75-150	3/4" Hollow Core x 150'
CH75-CUS	3/4" Hollow Core x Custom length – PER FOOT
CH75-100LW	3/4" Hollow Core, Loose Wound x 100'
CI75-050	3/4" Inner Core x 50'
CI75-080	3/4" Inner Core x 80'
CI75-100	3/4" Inner Core x 100'
CI75-110	3/4" Inner Core x 110'
CI75-120	3/4" Inner Core x 120'
CI75-130	3/4" Inner Core x 130'
CI75-140	3/4" Inner Core x 140'
CI75-150	3/4" Inner Core x 150'
CI75-CUS	3/4" Inner Core x Custom length – PER FOOT
CI75-050LW	3/4" Inner Core, Loose Wound x 50'
CI75-100LW	3/4" Inner Core, Loose Wound x 100'
CI75-CUS	3/4" Oil Tempered, Inner Core x Custom Length – PER FOOT
OH75-080	3/4" Oil Tempered, Hollow Core x 80'
OH75-100	3/4" Oil Tempered, Hollow Core x 100'
OH75-110	3/4" Oil Tempered, Hollow Core x 110'
OH75-120	3/4" Oil Tempered, Hollow Core x 120'
OH75-130	3/4" Oil Tempered, Hollow Core x 130'
OH75-150	3/4" Oil Tempered, Hollow Core x 150'
OH75-CUS	3/4" Oil Tempered, Hollow Core x Custom length – PER FOOT
CC75-025	3/4" Cable-in-cable x 25'
CC75-050	3/4" Cable-in-cable x 50'
CC75-075	3/4" Cable-in-cable x 75'
CC75-100	3/4" Cable-in-cable x 100'

Please specify if you would like ends on your cable when ordering.

## Cable Comparison

### Hollow-Core

Standard multi-purpose cable that is made from hard-drawn, high-tensile wire in a variety of diameters and lengths.

### Inner Core

Featuring a nylon floating strand which works against cable kinking and breakage. The nylon inner core gives more life to the cable at a small cost and doesn't add much weight to the cable.

### Cable-In-Cable

Also designed for long, straight runs, cable-in-cable is the stiffest cable we manufacture. The inner cable makes it more durable and therefore, less likely to break.

### Oil-Tempered

This cable is made of a stiffer material and is designed for long, straight runs. Because of the stronger material, the cable pushes like a rod through line blockages.

### Loose-Wound

Loose wound cable is very flexible and tackles corners faster and easier. It also fits in smaller reels easier without snaking.


Available in hollow or inner core cable.

**RJM 800-620-4773 www.rjmcompany.com brianmoss@rjmcompany.com**

## Cable 3/4"

Ideal for those heavy jobs when you need a stiff cable, 3/4" cable is great for ripping roots in 3" to 10" lines. For a "rod effect" in long straight lines, try 3/4" inner core.

FEMALE END FITTINGS		
Part#	10-Pack	Description
A4K	A4K-PK10	Female end for 3/4" cable
A4KK	A4KK-PK10	Female end kit for 3/4" cable (end, bolt #HHCS41, washer #WA10)
GEFC75	N/A	Female end for 3/4" cable (General Style)
GEFC34	N/A	Female end for 3/4" cable -weld on (General Style)
S74F	N/A	Female end for 3/4" cable (Spartan Style)
R92885	N/A	Female end for 3/4" cable (Ridgid Style)
RLPIN6	N/A	1/4" diameter x 3/4" roll pin for S74F



## MALE END FITTINGS

Part#	10-Pack	Description
A2K	A2K-PK10	Male end for 3/4" cable
A2KK	A2KK-PK10	Male end kit for 3/4" cable (end, nut #HXNUT11, washer #WA10)
GEMC75	N/A	Male end for 3/4" cable (General Style)
A6K	N/A	Male end for 3/4" cable (General Style)
S75M	N/A	Male end for 3/4" cable - left hand thread (Spartan Style)
76563	N/A	Male end (long) for 3/4" cable (Spartan Style)
76563K	N/A	Male end for 3/4" cable (Spartan Style)
R92880	N/A	Female end for 3/4" cable (Ridgid Style)



## MALE END FITTINGS

Part#	10-Pack	Description
A2K	A2K-PK10	Male end for 3/4" cable
A2KK	A2KK-PK10	Male end kit for 3/4" cable (end, nut #HXNUT11, washer #WA10)
GEMC75	N/A	Male end for 3/4" cable (General Style)
A6K	N/A	Male end for 3/4" cable (General Style)
S75M	N/A	Male end for 3/4" cable - left hand thread (Spartan Style)
76563	N/A	Male end (long) for 3/4" cable (Spartan Style)
76563K	N/A	Male end for 3/4" cable (Spartan Style)
R92880	N/A	Female end for 3/4" cable (Ridgid Style)



## Leaders and Tailpieces

CABLE ACCESSORIES	
Part#	Description
<b>LEADERS</b>	
FL62-002SO	2' Flexible leader, 5/8" with spartan style male ends
FL62-005-S62F	5' Flexible Leader, 5/8" with steel innercore, spartan style female end
FL69-002	2' Flexible Leader, 11/16"
FL69-002SP	2' Flexible Leader, 11/16" with spartan style male ends
FL75-002	2' Flexible Leader, 3/4"
FL75-002SP	2' Flexible Leader, 3/4" with spartan style male ends
<b>TAIL PIECES 4'</b>	
TS38-004	3/8" x 4' tail section with ends
TS38-004FR	3/8" x 4' tail section with ends, floating ring with reel attachment (D3E)
TS38-004PI	3/8" x 4' tail section with ends, push in anchor (D3S)
TS38-004SO	3/8" x 4' tail section with ends, snap on anchor (D3L)
TS50-004	1/2" x 4' tail section with ends
TS50-004FR	1/2" x 4' tail section with ends, floating ring with reel attachment (D3E)
TS50-004FRSJ	1/2" x 4' tail section with ends slip joint, floating ring with reel attachment (D3R)
TS50-004PI	1/2" x 4' tail section with ends, push in anchor (D3S)
TS50-004SO	1/2" x 4' tail section with ends, snap on anchor (D3L)
TS62-004	5/8" x 4' tail section with ends
TS62-004FR	5/8" x 4' tail section with ends, floating ring with reel attachment (D3R)
TS62-004FRSJ	5/8" x 4' tail section with ends slip joint, floating ring with reel attachment (D3R)
TS62-004PI	5/8" x 4' tail section with ends, push in anchor (D3S)
TS62-004SO	5/8" x 4' tail section with ends, snap on anchor (D3L)
TS62-004SP	5/8" x 4' tail section with male end, spartan style female ends, reel attachment (D3R)
<b>TAIL PIECES 10'</b>	
TS62-010P	5/8" x 10' tail section with male and female ends, floating ring for polyethylene reel, reel attachment (D3R)
DCH62-010LW	5/8" x 10' tail section with choice of ends
TS69-010	11/16" x 10' tail section with ends
TS69-010FR	11/16" x 10' tail section with ends, floating ring, reel attachment (D3R)
TS69-010FRSJ	11/16" x 10' tail section with slip joint ends, floating ring, reel attachment (D3R)
TS69-010P	11/16" x 10' tail section with ends, floating ring for polyethylene reel, reel attachment (D3R)
TS69-010SJP	11/16" x 10' tail section with slip joint ends, floating ring for polyethylene reel, reel attachment (D3R)
DCH69-010LW	11/16" x 10' tail section with choice of ends
TS75-010	3/4" x 10' tail section with ends
TS75-010FR	3/4" x 10' tail section with ends, floating ring, reel attachment (D3R)
TS75-010FRSJ	3/4" x 10' tail section with slip joint ends, floating ring, reel attachment (D3R)
TS75-010P	3/4" x 10' tail section with ends, floating ring for polyethylene reel, reel attachment (D3R)
TS75-010SJP	3/4" x 10' tail section with slip joint ends, floating ring for polyethylene reel, reel attachment (D3R)
DCH75-010LW	3/4" x 10' tail section with choice of ends