



Cam Spray Trailer Mounted Sewer and Drain Jetters

The STB4018D brings together all the same elements of versatility, mobility and power as the STS4018D in a different package. The STB4018D uses a 49 horsepower three cylinder Hatz Quiet Pack Air Cooled Diesel that operates below 79 decibels. Couple the quiet Hatz engine with an industrial five plunger pump with stainless valves and ceramic plungers producing 18 gallons per minute at 4000 psi you have the power for clearing up to 24" sewer and drain lines. Standard features include a manually operated power pulse valve for that extra push when you need it. Large volume inlet water filter, water shut off and rigid inlet hose feed. An Air purge valve and a 18 gallon anti-freeze tank gives you several ways to protect the pump and discharge plumbing from freezing conditions. A 25 gallon fuel tank gives you hours of run time on a single fill. The tandem axle trailer is heavily constructed with steel tube box frame, full diamond plate deck, protective covers over the pump, electric brakes, DOT rated 5000# axles, road ready lights and wiring, strobe light, powder coated finish, 2 and 5/16" ball hitch, hand crank jack stand, 15" Chrome Wheels and 6 bolt hubs.

The STB4018D uses a 300 gallon tank can be filled with the 2" hydrant fill and also included is 150' tank fill hose on a manual reel. Cam Spray recommends the tank be filled while on location. If your application requires you to transport water on roadways we would advise adding baffles to the tank. Contact Cam Spray for information on baffles for this model.

The hydraulic powered jet hose reel with variable speed and in and out control with a simple lever. All of your controls including the engine key start, engine throttle control, large pressure gauge, and high pressure water valve are located on the panel at the rear of the trailer as well, where most of your work is done.

For cold weather operation Cam Spray has made recirculation of the water easy. By simply removing the nozzle from the jet hose, attach the quick coupler plug and connect the hose to the recirculation coupler on the top of the tank. Turn the water shut-off valve back on and the water will continue to circulate keeping the system from freezing. Be sure to adjust engine speed to keep water flowing adequately as low flow and colder temps can still set up a water freezing condition.

Standard accessories include a 4 nozzle set (laser, degreaser/deicer, monster mole and flusher/ram) a storage box and a tip cleaner, a tiger tail to protect your hose when entering the drain line, safety shield, rubber gloves, strobe light, three DC power sockets in the tool box and a high visibility safety vest. Remember to use adequate safety gear and extreme caution while operating machinery.

When you are finished with the job wash down the area with the 50' wash down hose and trigger gun included.

All of your valuable equipment can be stored in the locking tongue mount tool box on the front the trailer.

Optional equipment includes a Rotating Nozzle for pipe finishing, Root Rat and Warthog root cutting nozzles and the DS200 reel cart with 200' x 3/8" hose or the 526488.J hand carry reel with 100' X 1/4" hose for remote jetting.

18 gallons per minute

RJM


800-620-4773

www.rjmcompany.com



Cam Spray Trailer Mounted Sewer and Drain Jetters

STB4018D

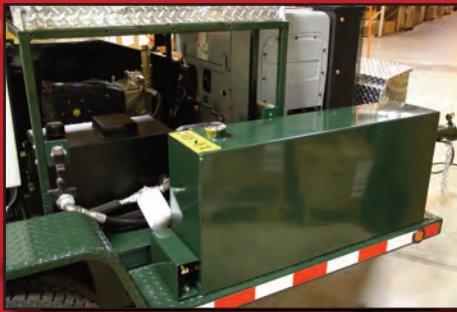

Pump Compartment



Back of STB4018D, locking tool boxes, control panel, control panel design may vary, tank fill hose, Hydraulic powered reel and hydrant fill.

18 gallons per minute

Model	PSI	GPM	H.P.	Engine	Jet Hose Dimensions	Reel Type	Water Tank Capacity	Dimensions L x W x H	Dry Weight
STB4018D	4000	18	49	Hatz Quiet Pack Air Cooled Diesel	500' x 1/2"	Hydraulic Powered	300 gallon	186" x 74" x 60"	4300 lbs



800-620-4773
www.rjmcompany.com